


ABSJ Series Key Product

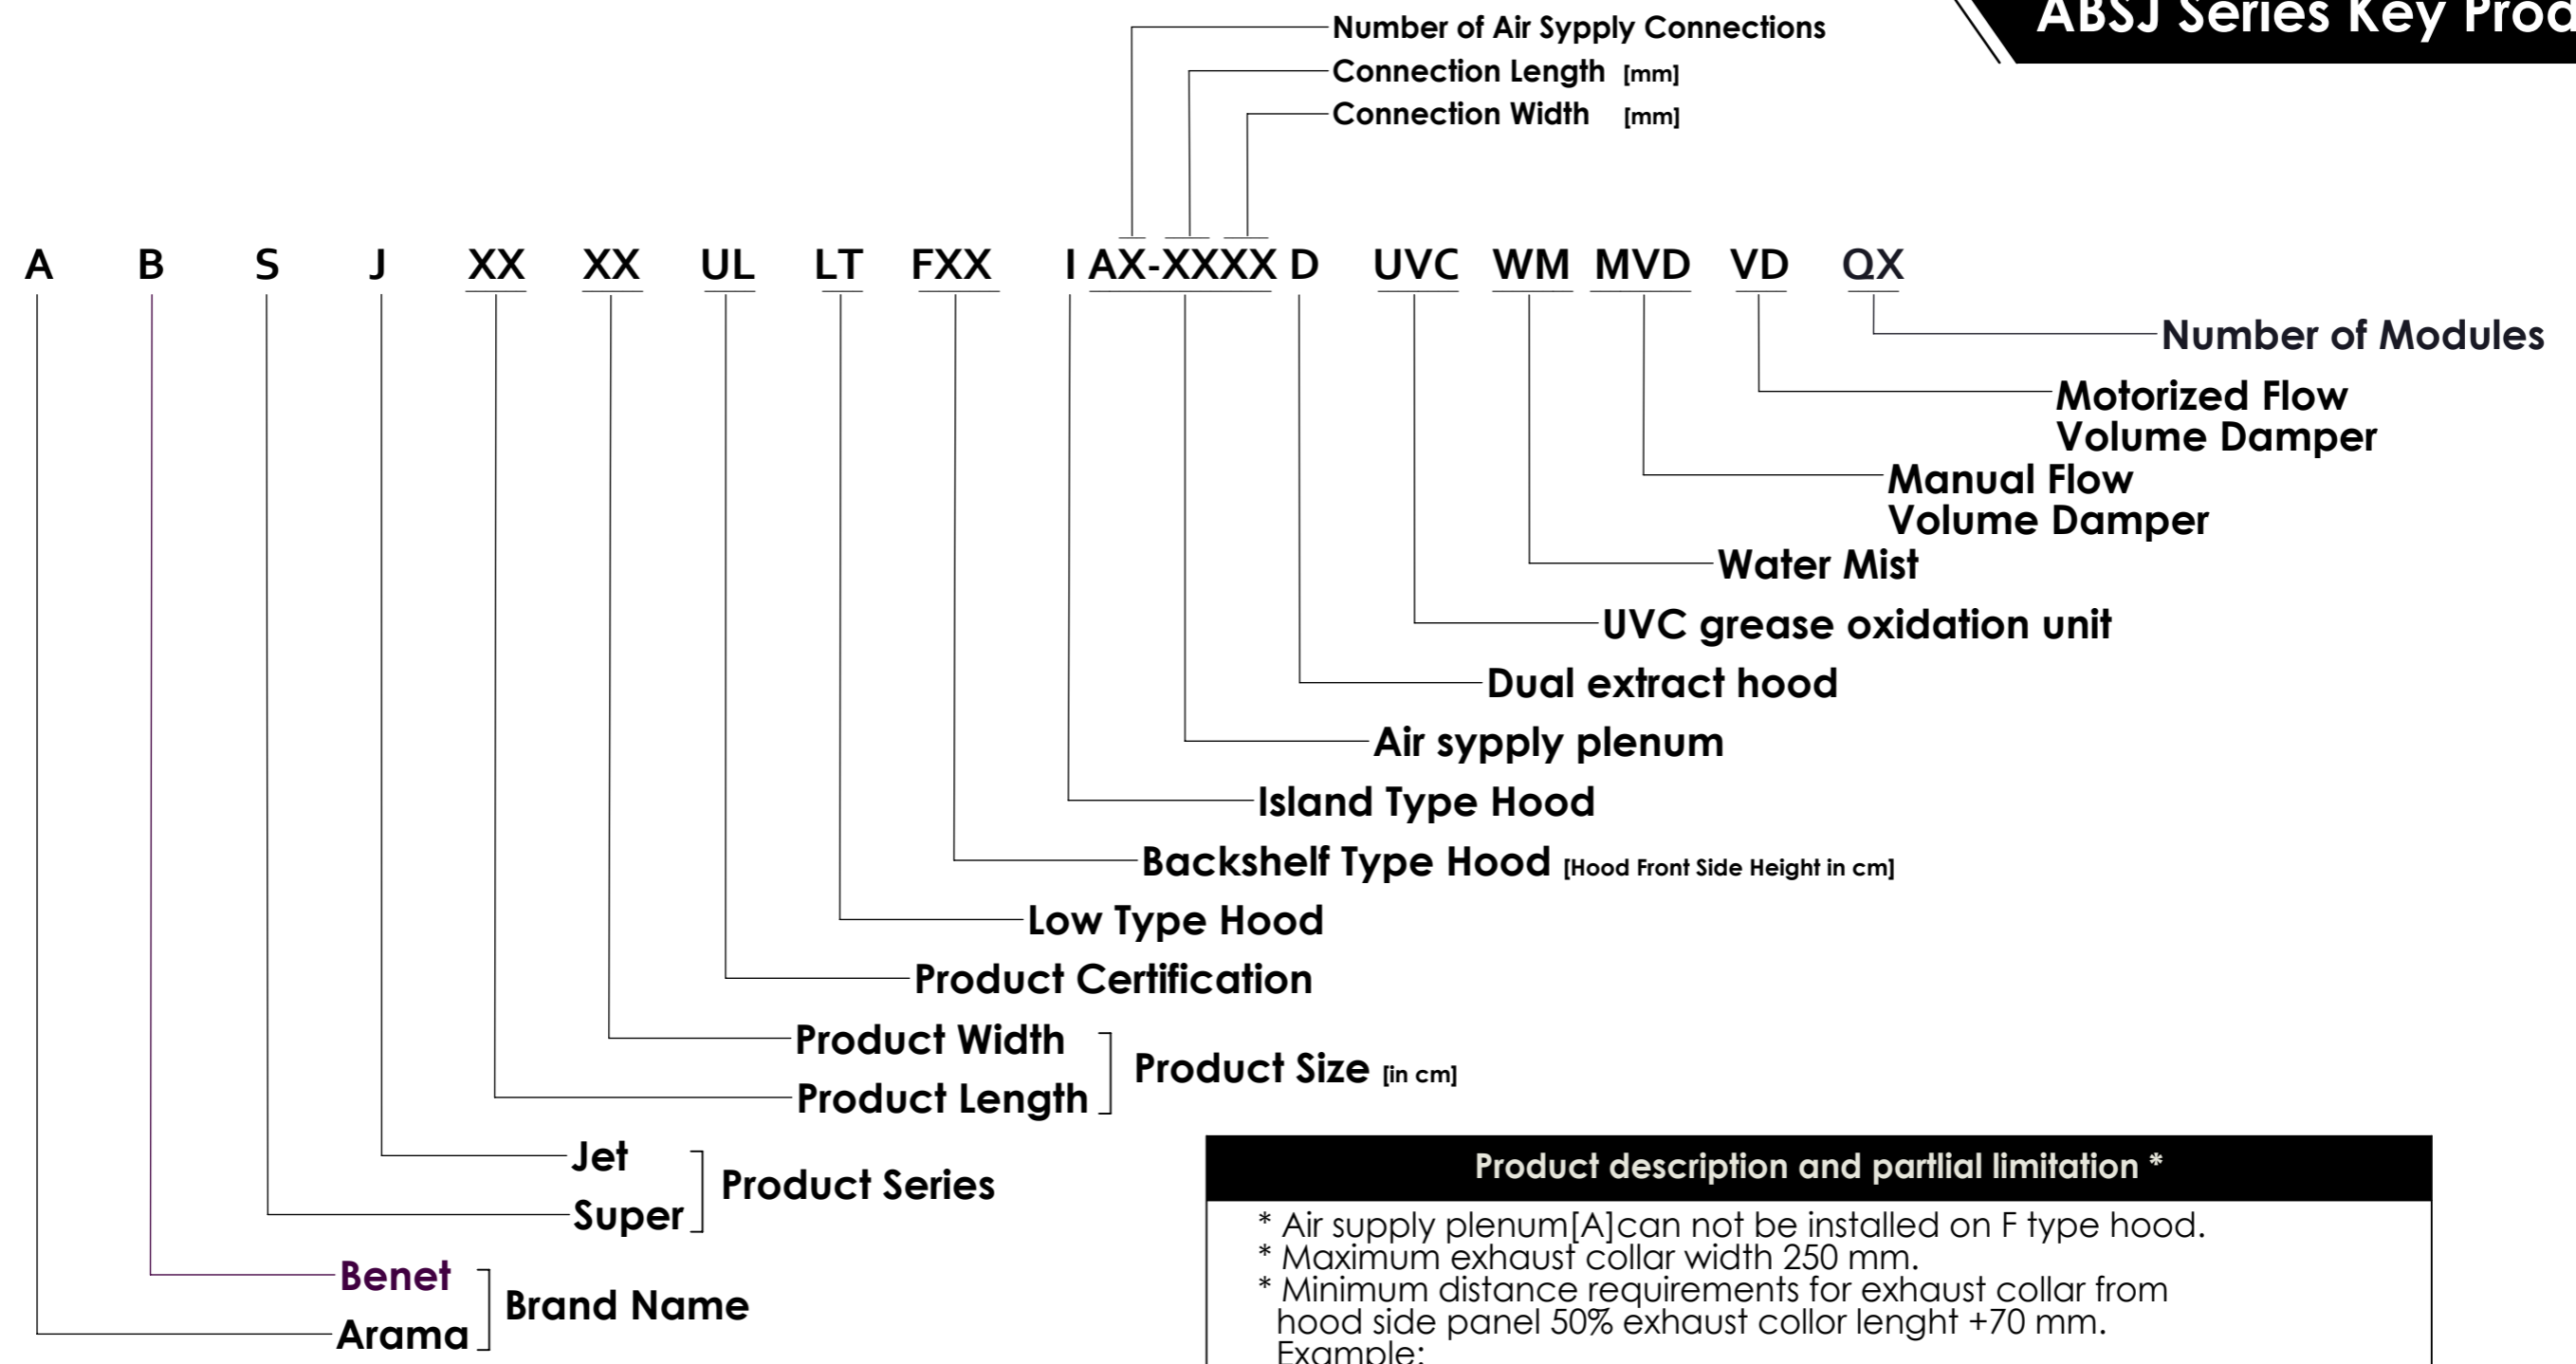

Product description and partial limitation *

- * Air supply plenum[A] can not be installed on F type hood.
- * Maximum exhaust collar width 250 mm.
- * Minimum distance requirements for exhaust collar from hood side panel 50% exhaust collar length +70 mm.

Example:
If exhaust collar length 500 mm, minimum distance should be $500 \div 2 + 70 = 320\text{mm}$.

How to read product key: ABSJ-2712-UL-LT-F30-UVC-MVD

1	2	3	4	5	6	7
ABSJ	2712	UL	LT	F30	UVC	MVD

Example I

1. ABSJ Series Super Jet Hood. [Default height 55 cm.]
2. Hood length 270 cm. Hood width 120 cm.
3. Hood certified UL-710 standard. Hood height default 55 cm. [Subject to change only to LT=40 cm.]
4. Hood height 40 cm. [Default height-not subject to change.]
5. Hood front height 30 cm. [Minimum height 20 cm.]
6. Hood upgraded UVC grease oxidation module(s).
7. Hood upgraded manual adjustable flow volume damper(s).

How to read product key: ABSJ-30-145-UL-A-WM-VD-Q2

1	2	3	4	5	6	7
ABSJ	30-145	UL	A	WM	VD	Q2

Example II

1. ABSJ Series Super Jet Hood. [Default height 55 cm.]
2. Hood length 300 cm. Hood width 145 cm.
3. Hood certified UL-710 standard. Hood height 55 cm. [Subject to change only to LT=40 cm.]
4. Hood upgraded with air supply plenum and perforated front panel.
5. Hood upgraded with Water Mist on Demand System.
6. Hood upgraded with motorized flow volume damper.(s)
7. Hood constructed of two modules.

* This list of product limitations is partial. For full information on product limitation see "ABSJ Series Product Limitation List" document

